

# **INTELLIGENT SENSOR PROTECTION SYSTEM FORMALLY KNOWN AS THE ARCTIC AUTONOMOUS RADIOMETER SYSTEM**

Dr. Peter J. Stein  
Mr. Armen Bahlavouni  
Scientific Solutions, Inc.  
18 Clinton Drive  
Hollis, NH 03049-6576  
pstein@mv.mv.com  
Voice: (603) 880-3784 Fax: (603) 598-1803  
Award No. N00014-95-C-0406

## **LONG TERM GOALS**

To develop a system for protecting sensitive meteorological type sensors for long term, unmanned, low power deployments in harsh environments such as the Arctic.

## **OBJECTIVES**

Heat balance studies of the Arctic require long term radiometric measurements. This includes the prediction of thermal ice stresses, and the resulting ice cracking and underwater ambient noise. However, making unmanned radiometric measurements in the Arctic is very difficult because of frost, freezing rain, and snow accumulation on the glass radiometer dome. Current methods for keeping radiometers clean, such as a ventilation fan, are too power consumptive for long-term deployments. They are also ineffective in heavy frost conditions, freezing rain, or heavy snow. The Arctic Radiometer System was a Phase I SBIR awarded to SSI to develop a housing system for keeping radiometers clean under Arctic conditions. A prototype system was design, built, and tested with very promising results. The success of this prototype, along with the realization that the approach could be used for a wide variety of sensors in a wide variety of harsh environments led to a Phase II effort. Under the Phase II, the project was renamed to the Intelligent Sensor Protection System (ISPS) to indicate its wider application. The objectives of the Phase II effort were to develop and test an advanced prototype of the ISPS Arctic version and design an ISPS marine version.

## **APPROACH**

The advanced prototype of the Arctic version of the ISPS is shown in Figure 1. The radiometer is housed in a sphere which is mounted at the top of a cylindrical housing. The sphere rotates about its axis via a computer controlled motor. In its normally closed position the radiometer faces downward inside the housing. On a preprogrammed schedule, say once per hour, the radiometer is rotated to its upward position for a measurement. During rotation any ice or snow accumulation is scraped off the sphere. For this purpose the sphere is anodized with a teflon impregnated coating such that it is very slippery. The computer also turns on a ventilation fan to help keep the radiometer clear only when deployed. Usually the radiometer is exposed for only about 60 seconds. After rotating it back inside, a light or heat source, depending on the type

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE <b>30 SEP 1997</b>		2. REPORT TYPE		3. DATES COVERED <b>00-00-1997 to 00-00-1997</b>	
4. TITLE AND SUBTITLE <b>Intelligent Sensor Protection System Formally Known as the Arctic Autonomous Radiometer System</b>			5a. CONTRACT NUMBER		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>Scientific Solutions, Inc,18 Clinton Drive,Holis,NH,03049</b>			8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSOR/MONITOR'S ACRONYM(S)		
			11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>Same as Report (SAR)</b>	18. NUMBER OF PAGES <b>3</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			

of radiometer, is turned on and a calibrated measurement is made. If it is determined that the sensor is corrupted, forced hot air is blown up over the radiometer dome. In this fashion any ice or snow is melted. For the marine version, the cleaning mechanism might be a fresh water spray. An underwater version is also in development in which the dome would rotate through a bromine bath on a programmed cycle to clean off biologics.

## **ACCOMPLISHMENTS**

Eight of the advanced prototypes of the Arctic versions are being deployed as part of the Office of Naval Research/National Science Foundations (ONR/NSF) Surface Heat Budget of the Arctic (SHEBA) program. The deployment at SHEBA will be the first time remote, unmanned, long-term radiometric measurements have been made under Arctic conditions.

## **IMPACT FOR SCIENCE/ SYSTEMS APPLICATIONS**

The Arctic version will be invaluable to global warming studies. The marine version will allow for enhanced deployments on Navy ships with improved data sets. The underwater version will allow for underwater optical measurements to be made on moorings for a much longer period of time. Presently, these deployments only yield useful data for a couple of months after which the sensors become severely fouled.

## **TRANSITIONS**

This SBIR is currently being transitioned to Phase III. ONR is supporting fabrication of one of the underwater versions. There is promise of support for fabrication and testing of a marine version.

## **RELATED PROJECTS**


The radiometer data being acquired at SHEBA is being taken along with underwater ambient noise and ice stress data. These data sets will be used to better understand thermally induced fracturing and underwater ambient noise in the Arctic.

## **PUBLICATIONS**

“Intelligent Sensor Protection System for Polar and Marine Environments”, (with P.J. Stein and D.W. Andersen), presented at the ISOPE-97 Honolulu Proceedings, Honolulu, HI, USA, May, 1997.

# Intelligent Sensor Protection System

## Photos of Arctic Radiometer Version (10 Built)

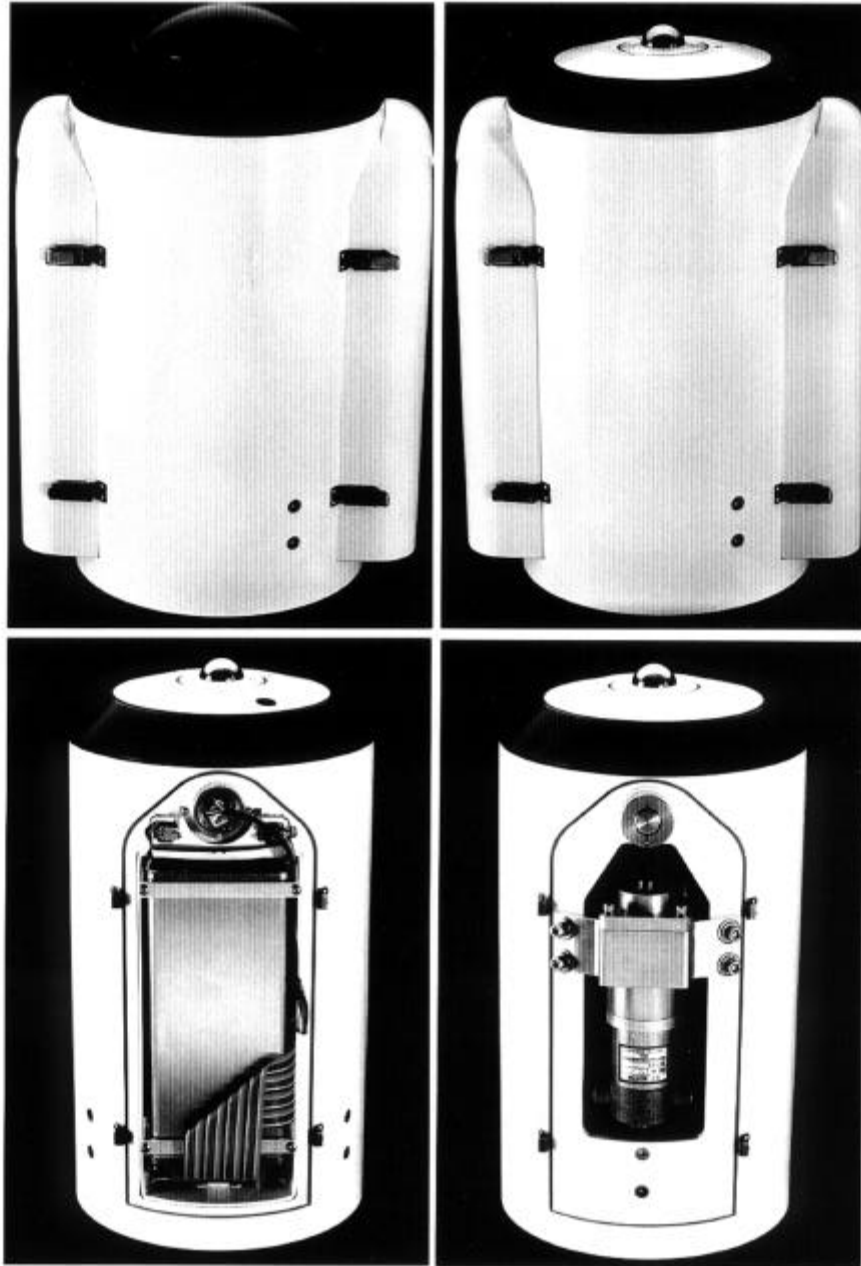

**SSI** Scientific Solutions, Inc.  
Innovative Research & Development

**Figure 1.** The advanced ISPS prototype.